


Steel deck  
and sandwich  
panel roof

# Hexaonde

Comfort range **Air**  
manual and electric

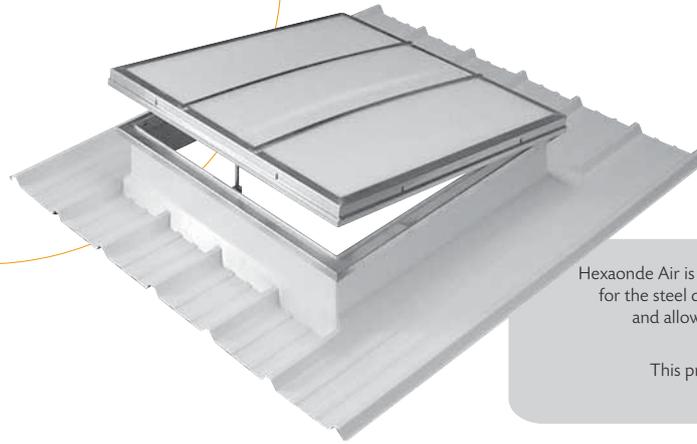

Hexaonde Air is a skylight specifically designed for the steel deck and sandwich panel roofs, and allows to carry out daily ventilation in the building.

This product is available with manual or electrical activation.

Dimensions

Performances

References	Inner dimensions in cm	Lighting Surface (SLu) in m <sup>2</sup>
C 100	100 x 100	1,00
C 120	120 x 120	1,44
C 140	140 x 140	1,98
C 160	160 x 160	2,56
100 x 150	100 x 150	1,50
100 x 200	100 x 200	2,00
140 x 200	140 x 200	2,80


Other dimensions are available with straight upstands (please, consult us).

The hinges are mounted in the longest side of the skylight.


Thank you to use the «guide de choix de profils» to check if the wanted profile is available in the requested dimension.

# Hexaonde

Comfort range **Air**  
manual and electric

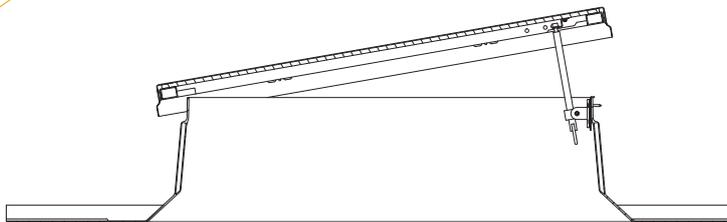

*Hexaonde Air manual in ventilation position*

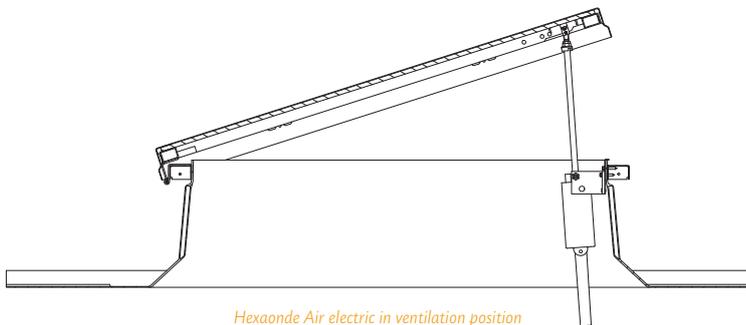

*Hexaonde Air electric in ventilation position*

#### COMPONENTS:

- A polyester upstand of 30 cm high, equipped with a thermal insulation.
- The outside and the underside of the polyester upstand are protected by a gel coat (RAL 9010 in standard, for further colors, please consult us).
- A frame in galvanized aluminium, fixed on the polyester upstand, which protects the periphery of dome or PCA.
- An opening mechanism:
  - Hexaonde Air Manual: a screw operated with the help of a crankshaft (250 mm stroke).
  - Hexaonde Air Electric: with an electric drive 230V, 50Hz, 150W, 0.7A, 300 mm stroke (switch in option).

#### FILLING:

- Our standard:
  - PCA 10 mm 4 skins
- In option:
  - PCA 16 mm 7 skins
  - Double dome in PMMA, polycarbonate or Hexachoc 1200J
  - Insulated aluminium cover

*For additional details, see the rubric of the options.*