


# Hexacoif Treuil

Comfort range

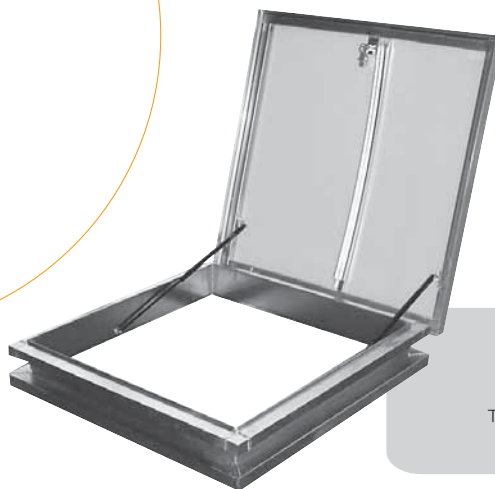

Hexacoif Treuil is a skylight designed for renovation and allows to carry out daily ventilation in the building. This product must be activated by a winch (sold separately).

Dimensions


Performances

References	Inner dimensions in cm	Lighting Surface (SLu) in m <sup>2</sup>
C 50	50 x 50	0,25
C 60	60 x 60	0,36
C 70	70 x 70	0,49
C 80	80 x 80	0,64
C 85	85 x 85	0,72
C 100	100 x 100	1,00
C 120	120 x 120	1,44
C 130	130 x 130	1,69
C 140	140 x 140	1,96
C 150	150 x 150	2,25
C 160	160 x 160	2,56
C 180	180 x 180	3,24
C 200	200 x 200	4,00
50 x 100	50 x 100	0,50
70 x 100	70 x 100	0,70
100 x 140	100 x 140	1,40
100 x 150	100 x 150	1,50
100 x 200	100 x 200	2,00
140 x 200	140 x 200	2,80

The hinges are mounted in the longest side of the skylight.

# Hexacoif Treuil

Comfort range

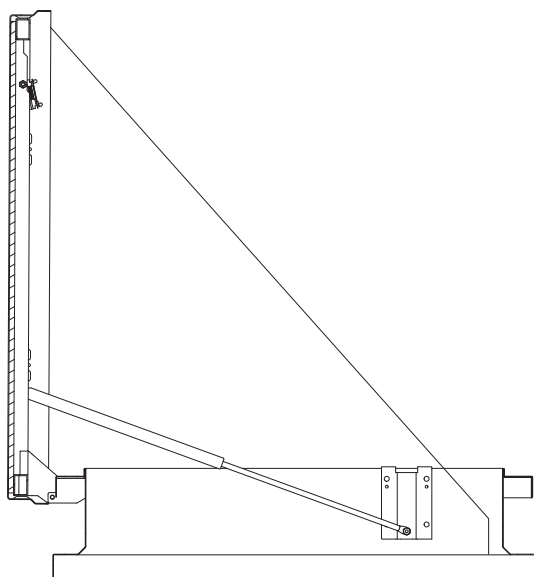

Hexacoif Treuil

#### COMPONENTS:

- A metallic upstand in galvanized steel of 150 mm high, which can be installed on all kind of existing support (concrete, steel, wood...).
- This product also allows to transform the original function of an existing skylight, while conserving the existing upstand.
- Hexacoif Treuil can be equipped in option with an insulated framework ( $U_f = 2.5W/m^2 K$ ).
- An aluminium frame which protects the periphery of dome or PCA.
- An opening mechanism:  
The opening power is given by one or two air-and-oil jacks integrated in the whole system. The opening and closing function is controlled from the floor by activating a winch which causes the rolling-up of the cable.

#### FILLING:

- Our standard:
  - PCA 10 mm 4 skins
- In option:
  - PCA 16 mm 7 skins
  - Double dome in PMMA, polycarbonate or Hexachoc 1200J
  - Insulated aluminium cover

*For additional details, see the rubric of the options.*